



ARMOIRE DE FERMENTATION RETARDER PROVER CABINET 600 x 800 mm pour chariot / for trolley

AFCH68-H

Photos non contractuelles / Photos not contractual



- Tableau de commande électronique
- Panneaux mousse polyuréthane
- Intérieur inox
- Groupe frigorifique tropicalisé
- Sonde hygrométrie électronique
- Taux d'humidité réglable de 35 à 85%
- Retour en froid standard
- Sur patins glissants
- Chariot non fourni
- Livrée montée
- 230/50Hz/1
- Puissance : 1.6 kW
- Poids net : 212 kg


Options :

- Chariot - Compresseur à distance
- Inox extérieur - Hublot - 60Hz
- Taux d'humidité réglable jusqu'à 95 %

- Electronical control panel
- Polyurethane foam panels
- Stainless steel interior
- Tropicalized refrigerating unit
- Electronical humidity probe
- Adjustable humidity rate from 35 up to 85%
- Standard cooling phase
- On gliders
- Trolley not supplied
- Supplied assembled
- 230/50Hz/1
- Power : 1.6 kW
- Net weight : 212 kg

Options :

- Trolley - Condensate pan
- Stainless steel exterior - Window
- 60Hz - Adjustable humidity rate up to 95 %

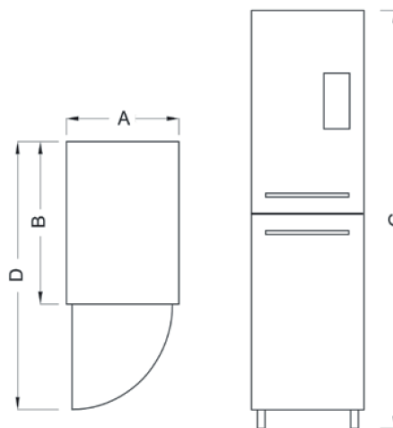

A = 870 mm
B = 1238 mm
C = 2230 mm
D = 1950 mm

